

D HINGE


D HINGE Series Soft-close Hinges

PRODUCT




DESCRIPTION

- Range of door thickness: 18-32mm
- Soft-close
- Opening angle: 103°
- Side, height and depth adjustment
- Maximum door width: 600mm
- Maximum door height 2100mm
- Maximum door weight 20kg

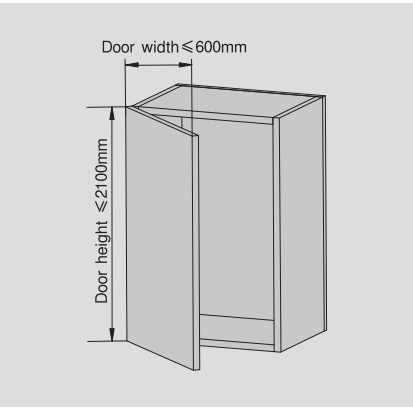


PLANNING

Space needed to open the door

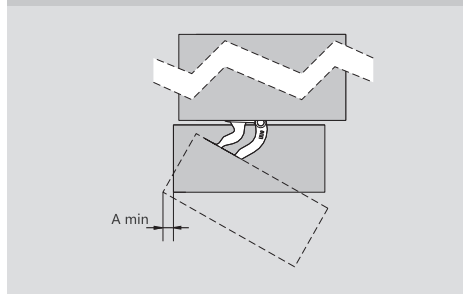

L=Gap between door and carcass K=Cup hole drilling distance from door edge T=Door thickness									
	T=	T=18	T=20	T=22	T=24	T=26	T=28	T=30	T=32
K=3	A=	0.1	0.2	0.5	0.9	1.4	2.1	3.1	4.7
K=4	A=	0.1	0.2	0.5	0.9	1.4	2	2.9	4.2
K=5	A=	0.1	0.2	0.5	0.8	1.3	2	2.8	3.9
K=6	A=	0.1	0.2	0.5	0.8	1.3	1.9	2.7	3.7


Space needed to open the door

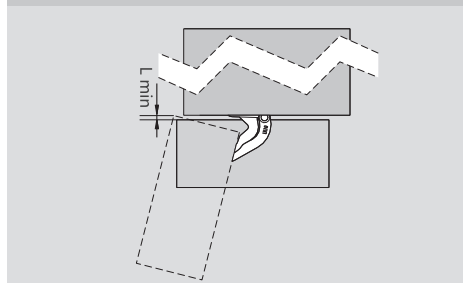


L=Gap between door and carcass K=Cup hole drilling distance from door edge T=Door thickness									
	T=	T=18	T=20	T=22	T=24	T=26	T=28	T=30	T=32
K=3	L=	0	0	0	0	0	0	0	0
K=4	L=	0	0	0	0	0	0	0	0
K=5	L=	0	0	0	0	0	0	0.1	0.6
K=6	L=	0	0	0	0	0	0.5	1.1	1.6

		D HINGE / Industrial Package Titanium black	
Strength	Door weight	Item No.	Set/ctn
Light	<7kg	TD0ARL	100
Strong	7kg~20kg	TD00RL	100
		Fixing Bracket	
Item No.			LK14-RL
Set/ctn			100
		Plastic Cover Black	
Item No.			LK13
Set/ctn			100


ORDER INFORMATION

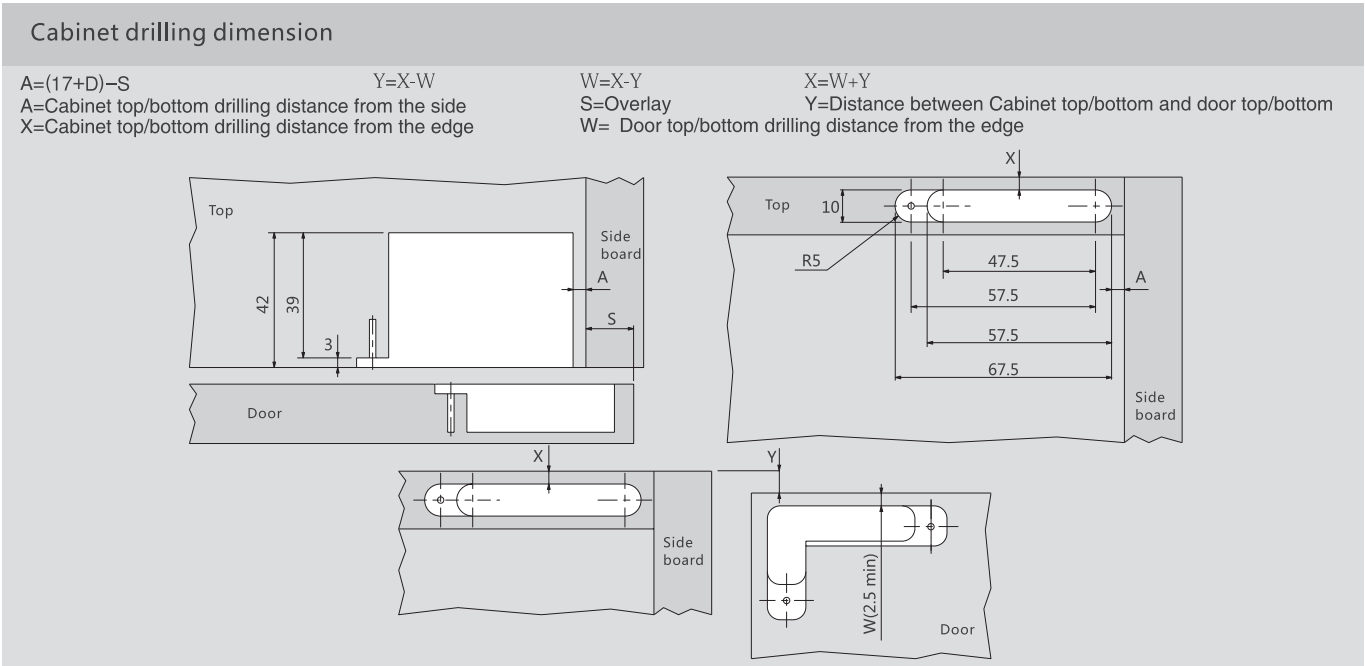

Wooden door drilling dimension

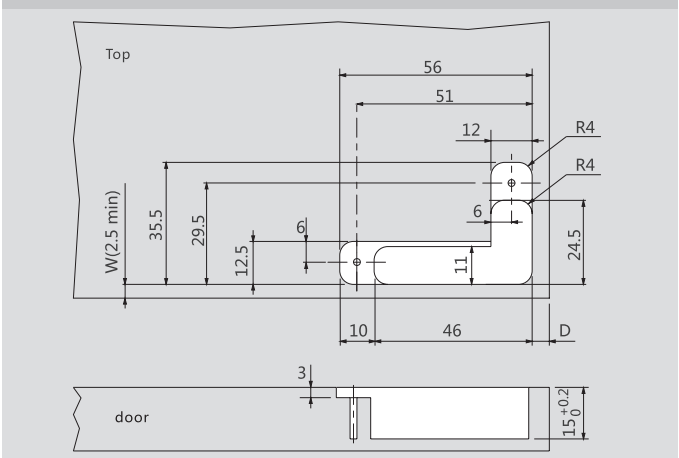

Aluminum door drilling dimension

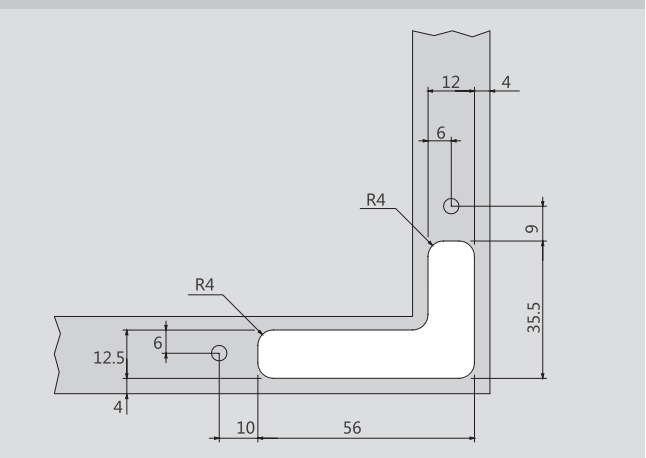

Adjustment

